
Etac Swift Mobil-2 @etac® Manual

78691L 21-08-17







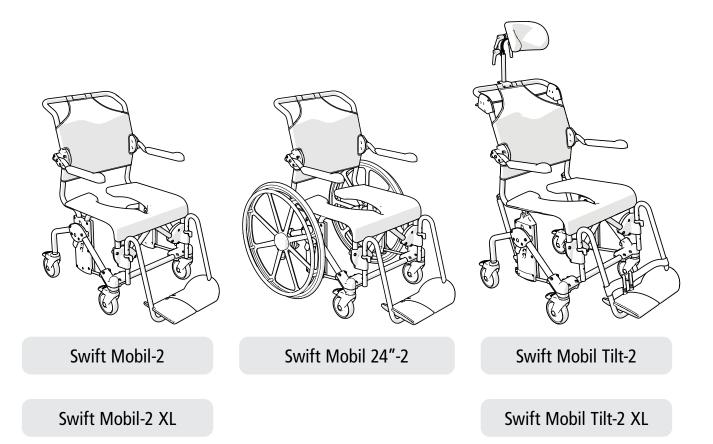






















Α



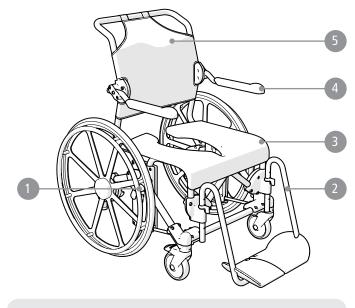

Swift Mobil 24"-2

Swift Mobil-2 XL

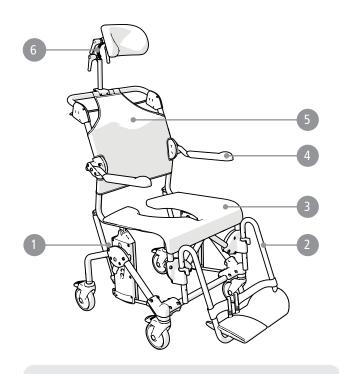

Swift Mobil Tilt-2

Swift Mobil Tilt-2 XL

























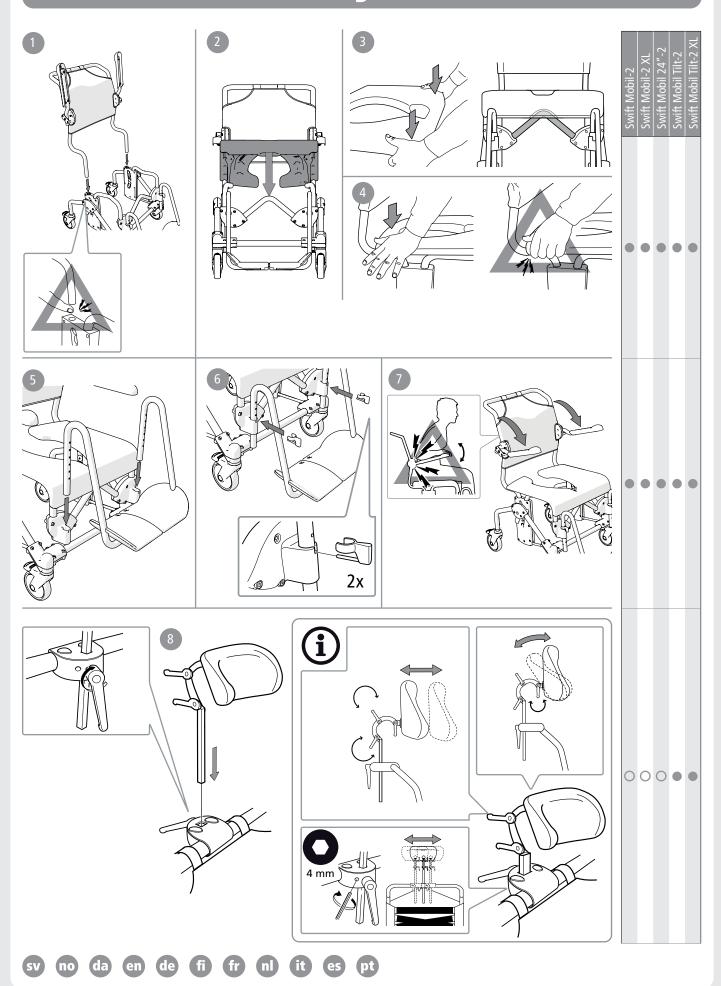

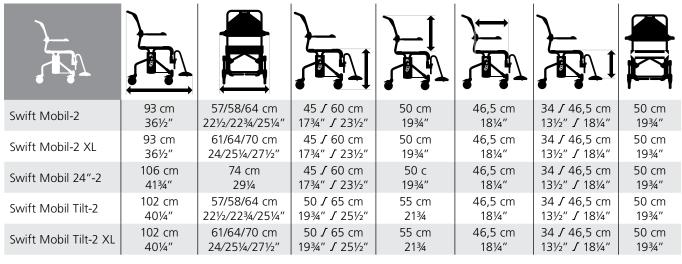

						\$		KG
	Swift Mobil-2	22/25/28 cm 8¾/9¾/11"	42/48/54 cm 16½/19/21¼"	54 cm (47 cm*) 21¼" (18½"*)	95-110 cm 37½"-43¼"	125 mm 5"	-	16,6 kg 37 lbs
	Swift Mobil-2 XL	22/25/28 cm 8¾/9¾/11"	48/54/60 cm 19/ 21¼/23½"	54 cm 21¼"	95-110 cm 37½"-43¼"	125 mm 5"	-	17,3 kg 38 lbs
	Swift Mobil 24"-2	22/25/28 cm 8 ³ / ₉ ³ / ₁₁ "	42/48/54 cm 16½/19/21¼"	67 cm 26¼"	95-110 cm 37½"-43¼"	125 mm 5"	610 mm 24"	25,1 kg 55 lbs
	Swift Mobil Tilt-2	22/25/28 cm 8 ³ / ₄ /9 ³ / ₄ /11"	42/48/54 cm 16½/19/21¼"	60 cm 23½"	100-115 cm 39¼"-45¼"	125 mm 5"	-	20,4 kg 45 lbs
	Swift Mobil Tilt-2 XL	22/25/28 cm 8 ³ / ₉ ³ / ₄ /11"	48/54/60 cm 19/ 211/4/231/2"	60 cm 23½"	100-115 cm 39¼"-45¼"	125 mm 5"	-	21 kg 46 lbs

^{*}Art no 8022 9489, 8022 9490, 8022 9491

	max kg		max lbs			
Swift Mobil-2	160 kg	135 kg**	352 lbs	297 lbs**		
Swift Mobil-2 XL	160 kg		352 lbs			
Swift Mobil 24"-2	160 kg	135 kg**	352 lbs	297 lbs**		
Swift Mobil Tilt-2	160 kg	135 kg**	352 lbs	297 lbs**		
Swift Mobil Tilt-2 XL	160 kg		352 lbs			

^{**} Art No 8022 9477, 8022 9478, 8022 9479, 8022 9486, 8022 9487, 8022 9488, 8022 9491

























































































F

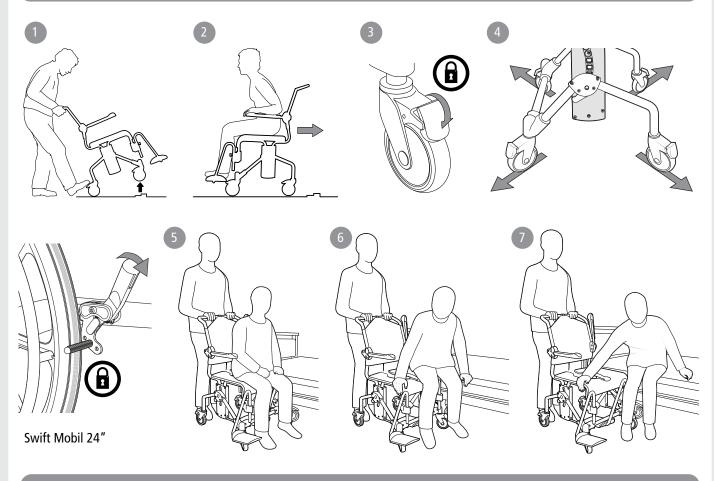



G

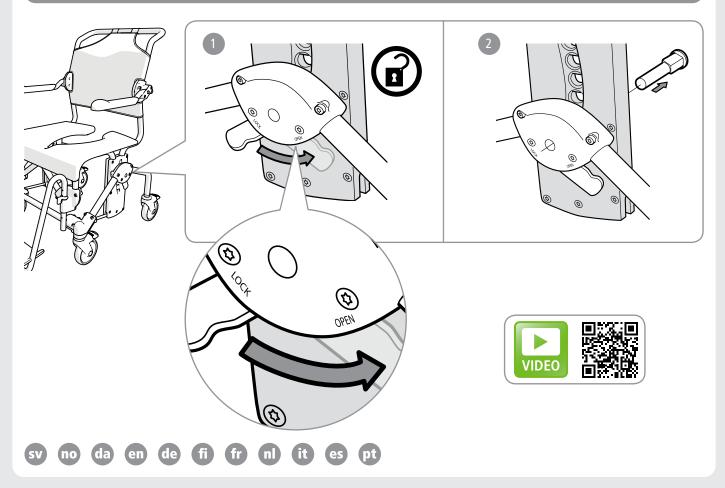


G

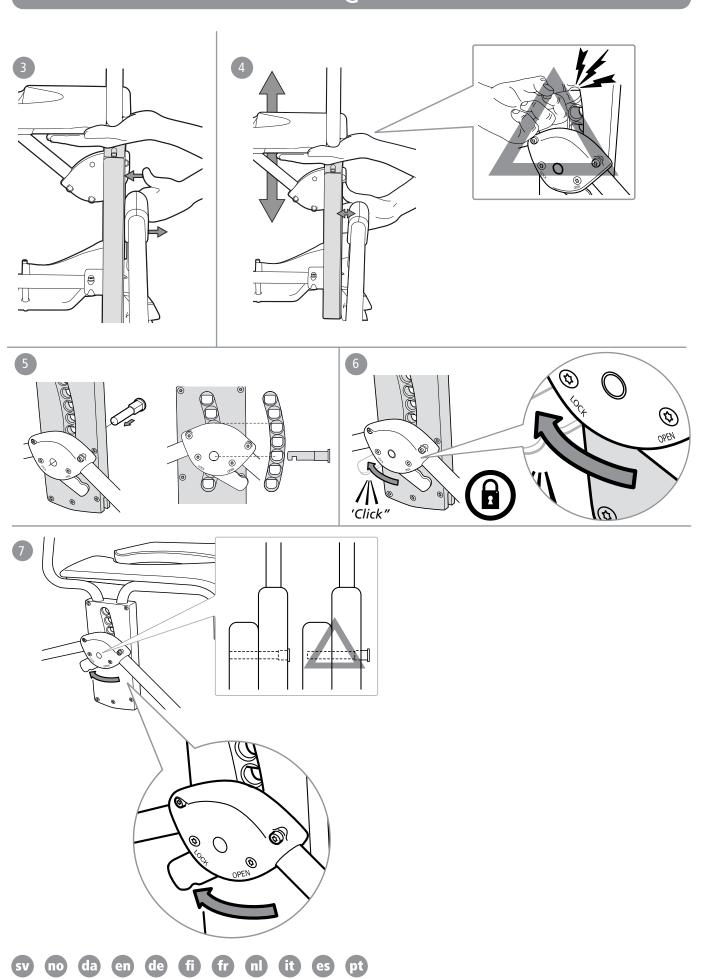

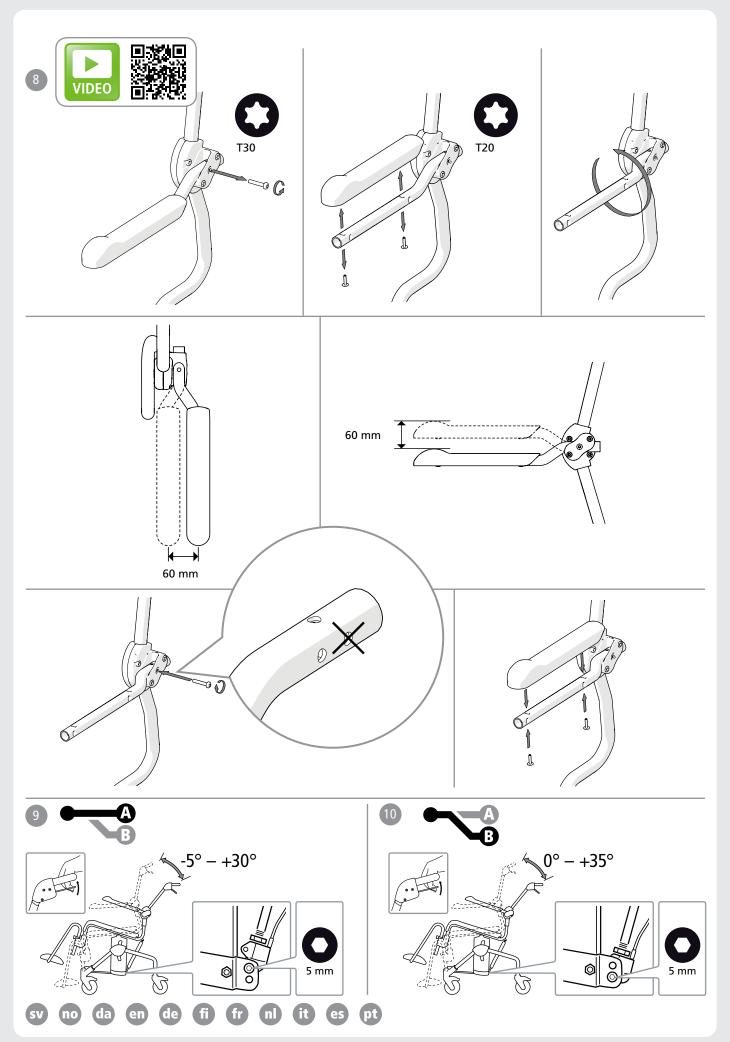

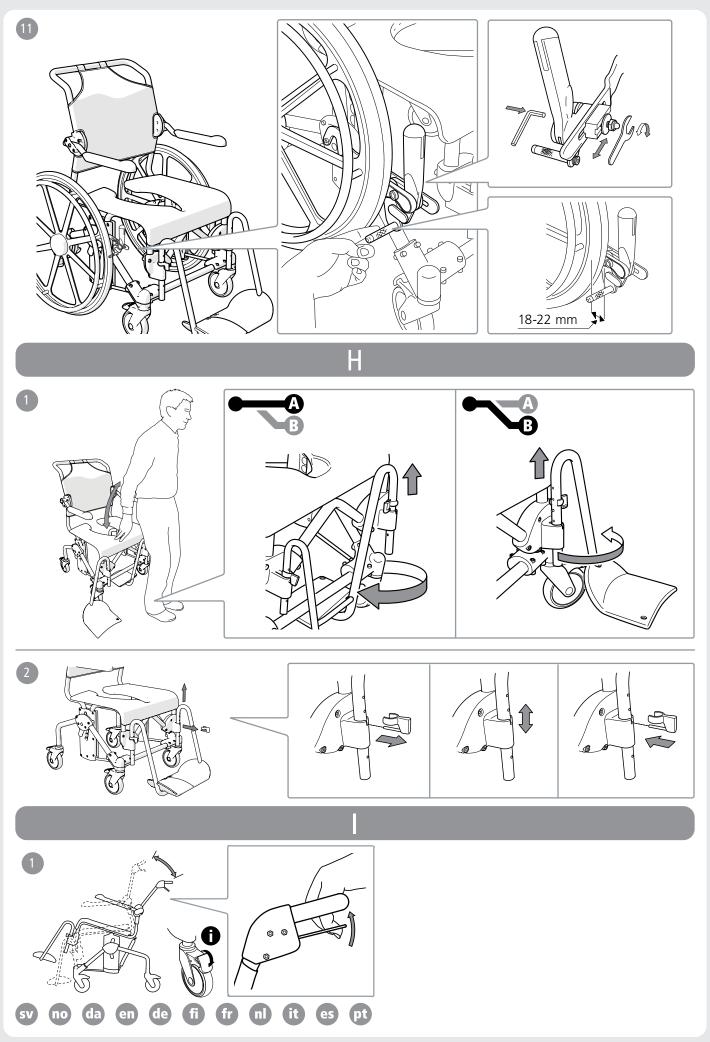

П

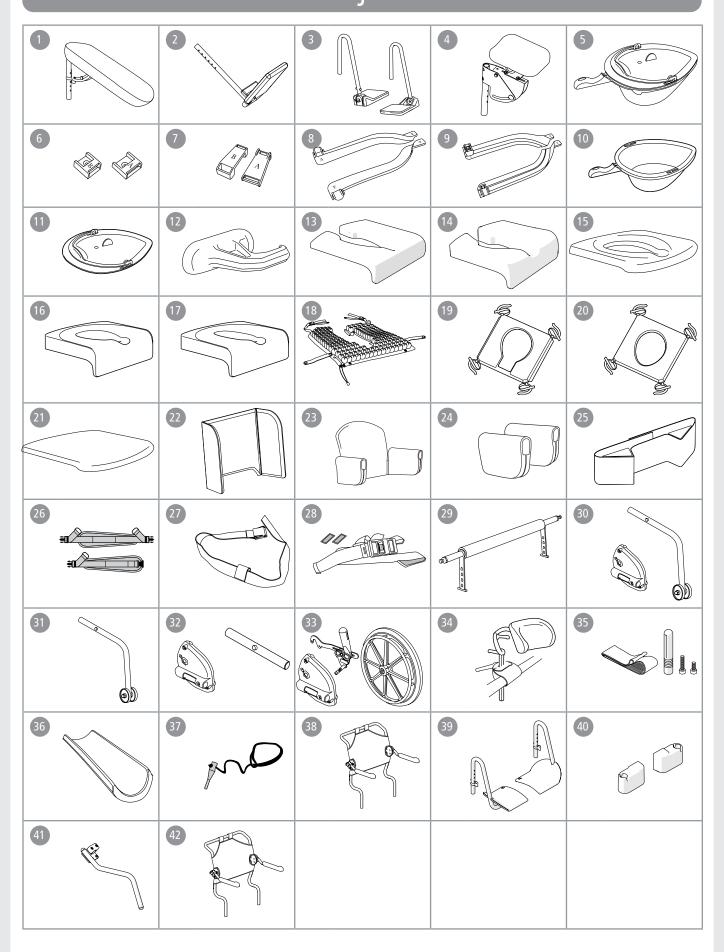

no da en de fi fr nl it es pt

English

General

Thank you for choosing an Etac product.

In order to avoid injury during handling and use, please read through this manual first.

In the manual, the user is the person sitting in the chair. The carer is the person helping the user.

Intended use:

The Swift Mobile 2 family is a range of mobile shower chairs and toilet chairs (hereafter called the product) intended for indoor use when performing hygiene tasks for people with restricted mobility. The product can be used in the shower, at a sink, or over the toilet, as well as for transfers to and from the hygiene room.

The product is intended for use in home environments and institutions.

The product is suitable for use in wet areas, but not pools or similar corrosive environments.

The product is intended to compensate for various types of injuries or disabilities that limit the mobility of the user.

The product is intended for adult users, generally persons who are at least 146 cm tall and who weigh at least 40 kg.

The product is not intended for any other use or environment beyond those stated above.

The product has been tested and complies with the requirements set out in EN ISO 10993-1 and SS EN 12182.

The product conforms to the requirements of the Medical Devices Regulation (EU) 2017/745.

Contra indications:

There are no known contraindications.



This symbol appears in the manual along with text. It indicates instances where the safety of the user or the assistant may be at risk.



The images which are referred to on each page are found at the start of the manual (pages 3 to 11). See Figures A to J for the corresponding text.



This product should be recycled as per national regulations.

Item list: \blacksquare = Applies to, \bigcirc = Accessories

See the item list on the right which displays the information applicable to each product.

Product description

See Figure A

A1. Bolt, A2. Leg support, A3. Seat, A4. Arm support, A5. Back support upholstery

A6. Head support

Assembly

See Figure B

Technical data See Figure

Warranty / maintenance

See Figure D

5-year guarantee against material and manufacturing defects. For terms and conditions, see www.etac.com.

Service life 7 years. For complete information regarding the service life of the product, see www.etac.com.

D1. Clean the product with normal non-abrasive cleaning agents (pH value of between 5-9). Rinse and dry.

Disinfect the product with an alcohol-based disinfectant, 70%.

Disinfect the product with an alcohol-based disinfectant, 70%. The product is otherwise maintenance-free.

D2. The product and its accessories can be safely cleaned at 85°C for 3 minutes (unless otherwise stated). This applies for reconditioning.

The product can be reconditioned. Refer to the reconditioning instructions at www.etac.com.

Constituent materials are resistant to common disinfectants.

The following surface treatment methods have been used to protect against corrosion:

Lacquered surfaces = Polyester powder coating Non-lacquered steel surfaces = Fe/Zn-Ni

Reuse

The product is suitable for reuse. The number of times it can be reused depends on how often and in which way the product is used. Before reuse, thoroughly clean and disinfect the product and check its safety features. If necessary, take remedial action.

🛕 Safety

See Figure E



Defective chairs must not be used.

- **E1.** Make sure the castors are locked when users sit down on or get up from the chair.
- An anti-tip attachment must be used if the user is an amputee.
- **E2.** Never stand on the foot supports as there is a risk of tipping!
- **E3.** The sitting position has an impact on stability.
- **E4.** Chair stability is improved if the castors point outward.
- **E5.** See the maximum user weight for your commode chair in the table (page 5).

E6. Risk of crushing with arm supports.

E7. Do not use defective products.

In case of an adverse event occurred in relation to use of the device, it should be reported to your local dealer and the national competent authority in a timely manner. The local dealer will forward information to the manufacturer.

Swift Mobil 24"-2 Swift Mobil 14"-2 Swift Mobil Tilt-2 Swift Mobil Tilt-2

00000

000

English

Transfers

Over a threshold:

F1. Chair only, put one foot on the wheel.

Transferring:
Assess the risks and take notes. You as a carer are responsible for the

F2. With user, pull the chair backwards.

In stationary position:

F3. Always lock as many castors as possible when the chair is to be used in a stationary position.

F4. Out-turned castors improve the chair's stability.

Assess the risks and take notes. You as a carer are responsible for the safety of the user. Aids should be used if the transfer is deemed as risky. Visit www.etac.com for manual transfer aids.

F3-F4. It is important to ensure that the castors are locked and pointing outward before carrying out transfers to and from Swift Mobil-2.

F5-F7. Fold up the arm support on the transfer side of the chair. Carry out the transfer.

Adjustment See Figure G

Height:

G1-G7. The height is easily adjusted by inserting the bolt in the required position. See distances in the technical data section.



Check that both sides have been adjusted to the same height as otherwise stability can be reduced. G7. Do not use the chair if the bolt (orange) is not locked.

Arm supports:

G8. The height of the arm supports and/or width between the arm supports can be adjusted. Loosen the screws, twist the support to the desired position and retighten the screws. Then loosen and refit the arm support plate in the correct position. Swift Mobil Tilt-2 XL is delivered with the arm supports mounted in the most inward position (seat width 48 cm).

Tilt angle:

G9. Fit the gas piston in position A to tilt the seat at angles from -5° to 30°

G10. Fit the gas piston in position B to tilt the seat at angles from 0° to 35°

Isar hraka

G11. When adjusting the brake, the brake pin should be set 18 to 22 mm from the rear wheel for good grip.

Leg support See Figure H

H1. The assistant can easily raise and swivel the leg supports to the side for the user to sit down in or get up out of the chair. The foot supports are detachable.

H2. Various height adjustment options are available by moving the locking pin. The leg supports have 6 different height settings.

Tilt function See Figure 1

11. The assistant can adjust the sitting angle with ease by holding in the handle and tilting to the required position. Make sure that the wheels are locked if the tilt function is used when the user is sitting in the chair.

Swift Mobil-2 XL Swift Mobil 24"-2 Swift Mobil Tilt-2















English

Accessories See Figure .

In the section "Accessories", you can see all accessory options available for your product. Variations may occur in different markets. There are restrictions on accessory combinations, for more information, see www.etac.com.



See Figure J		Sw M2 Sw M2 XL Sw M. 24"-2 Sw M. Tilt-2 Sw M. Tilt-2	See Figure J		Sw M2 Sw M2 XL Sw M. 24"-2 Sw M. Tilt-2 Sw M. Tilt-2 XL
J1.	Leg and calf rest, angle-variable	00000	J23.	Comfort padding	0 00
J2.	Footrest	00000	J24.	Armrest cushion, pair	00000
J3.	Angle adj. footrest	00000	J25.	Trunk support	00000
J4.	Amputee legrest	00000	J26.	Chest and hip positioning belts	00000
J5.	Commode pan	00000	J27.	Chest belt	00000
J6.	Pan-holder attachments	00000	J28.	Positioning belt	00000
J7.	Attachments for low pan-holder mounting	00000	J29.	Crossbar 605 mm	0 00
J8.	Commode pan holders	00000	J29.	Crossbar 665 mm	00000
J9.	Bucket holders	00000	J30.	Anti-tip stabilisers including bracket	00000
J10.	Pan	00000	J31.	Anti-tip stabilisers excluding bracket	00000
J11.	Lid with handle	00000	J32.	Tilter	00000
J12.	Splash guard	00000	J33.	Rear wheel kit	00
J13.	Soft Comfort seat, 2 cm high, open at back	00000	J34.	Headrest and bracket	0000
J14.	Soft Comfort seat, 4 cm high, open at back	00000	J35.	Heel straps	0000
J15.	Comfort seat	00000	J36.	Hemiplegic armrest	00000
J16.	Soft Comfort seat	00000	J37.	Armrest lock	00000
J17.	Soft Comfort seat - narrow opening	00000	J38.	Extended back support	000
J18.	Protect cushion - pressure-relieving	00000	J39.	Short leg support	00000
J19.	Soft cushion - standard opening	00000	J40.	Widening kit for leg support	00000
J20.	Soft cushion - oval opening	00000	J41.	Anti tip front	00000
J21.	Seat cover	00000	J42.	Back Swift Mobil-2, upright	000
J22.	Soft back pad	00000			